


# woodhouse perimeter<sup>®</sup>

GESO PRE-COATED TIMBER MOULDINGS

## INTERNAL FIX-OUT MOULDINGS

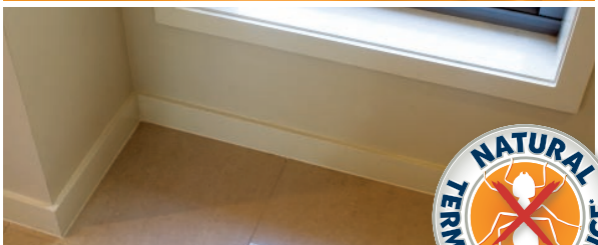

## Woodhouse Perimeter<sup>®</sup> Gesso Pre-Coated Mouldings Product Definition

Woodhouse Perimeter<sup>®</sup> is the new range of **Gesso Pre-coated mouldings** from the Woodhouse Timber Company. Suitable for internal applications only and manufactured from finger jointed solid timber, the range of Woodhouse Perimeter<sup>®</sup> mouldings are easy to cut, drill, install and finish.

The Perimeter range of mouldings are primed with a water-based coating that bonds to the moulding's surface.



## Features and Benefits

- ┆ Perimeter Pre-coated with a Gesso primer, enabling a single coat finish in most instances depending on the application's requirements (final finish may vary according to topcoat quality and thickness of application);
- ┆ Suitable for all internal moulding applications only;
- ┆ Made from a Cypress species that has a natural measure of resistance to termite attack;
- ┆ Finger-jointed and kiln dried to provide a straight and stable moulding;
- ┆ Produced in 2.4, 3.0 and 5.4 metre lengths (check store availability with your salesperson);
- ┆ Installed with typical finishing gun T-nails or brads, as well as conventional hammer driven fixings;
- ┆ Holes or defects can be filled with a timber filler/putty prior to painting; and
- ┆ Readily finished with oil-based or acrylic (water-based) quality paints.

**GESO PRE-COATED  
TIMBER MOULDINGS**  
Product Guide

# Product Handling, Installation and Waste Disposal

Prior to installation and finishing, all mouldings should be kept in a well ventilated, dry area that is not in contact with the ground or exposed to the weather.

The Perimeter range can be cut, nailed and installed with traditional tools as an internal fix-out moulding. Ensure that the appropriate personal protective equipment is worn when working with all timber products to guard against airborne wood dust, fibres and coating residue. Prepare for final painting by filling any imperfections and nail holes with a suitable wood filler and then sand to a smooth finish.

Any moulding offcuts can be disposed with normal building waste into a suitable landfill. Do not burn or incinerate offcuts.

## Painting and Final Finishing

All **Woodhouse Perimeter**<sup>®</sup> mouldings can be finished with either oil based or water-based (acrylic) paints. Once the mouldings have been installed, fill any holes with a wood filler and lightly sand to an even finish. Spot prime any areas where the timber may have been exposed.



Apply a quality topcoat of water-based (acrylic) or oil based paint to the moulding. If an even better finish is desired, add subsequent coats to achieve a desired finish.

## Environmental Compliance

The **Woodhouse Perimeter**<sup>®</sup> range of mouldings are manufactured from renewable resources (*cunninghamia lanceolata*) that are harvested according to sustainable practices. All material used in the production process has been procured from well managed forests that have been planted specifically for commercial enterprise.

**DETAILED PRODUCT INFORMATION  
IS ALSO AVAILABLE AT THE TRADE  
AND SPECIAL ORDERS COUNTER.**



**QUEENSLAND** Phone: 07 3217 0622 Fax: 07 3217 0551

**NEW SOUTH WALES** Phone: 02 9609 3388 Fax: 02 9609 3366

For more information on the entire Woodhouse Range,  
contact us on: Toll Free: 1300 880 662  
or email: [info@woodhouse.com.au](mailto:info@woodhouse.com.au)

[www.woodhouse-perimeter.com.au](http://www.woodhouse-perimeter.com.au)

Whilst all care has been taken to ensure the accuracy of the information and advice on this document, it is intended as a guide only. The Woodhouse Timber Company accepts no responsibility for any errors, omissions, work done or any consequence of reliance of this document to the extent permitted by law. Specifications are subject to change without notice, in accordance with national regulations and legislations. All material and content remains the property of, and is copyright to, the Woodhouse Timber Company.

\* All Woodhouse Perimeter<sup>®</sup> Gesso Pre-Coated Mouldings are manufactured from a species of conifer that is a member of the cypress family (Cupressaceae). The physical properties of this species suggest a natural resistance against termite attack and fungal decay. The presence of these physical properties should not substitute or replace the requirement of an approved termite prevention system as outlined by the Building Code of Australia and any local authority. The Woodhouse Timber Company do not warranty the physical properties or performance of the Perimeter range of mouldings, or guarantee performance with regard to termite and/or fungal attack.

# The coating on the range of Woodhouse Perimeter<sup>®</sup> Gesso Pre-Coated Mouldings has been machine applied to provide a surface coating suitable for final finishing. Whilst in most instances a single application of topcoat paint is suitable, the quality of the painted surface following this application may demand and require further additional coats. This requirement is subjective and may be affected by the quality of the topcoat paint used; the application of the coating; and the desired outcomes of the end user. Refer to the paint manufacturers guide for further instructions on finishing.